

Installation Guide

15mm Clip-On Series

As a result of our AliWood Pty Ltd constant product improvement program, product changes may occur. As such, AliWood Pty Ltd reserves the right to change product without prior written notification.

Introduction

This guide will show you how to manufacture & install the AliWood Clip-On Series.

IMPORTANT

Please read all the instructions prior to starting the installation of your Clip-On. Understanding the process correctly will be the difference between a good and great result.

The recommendations detailed in this guide produced by AliWood Pty Ltd are formulated along the lines of good building practice. They are not intended to be an exhaustive statement of all the relevant data. Further, as the success of projects depend on factors outside the control of AliWood Pty Ltd (e.g. quality of workmanship, particular design, detail requirements, etc). Aliwood Pty Ltd accepts no responsibility for, or in connection with, the quality of the projects or their suitability when completed.

Tools Required:



Drop Saw



Tape Measure



Spirit Level



Driver Bit



Drill / Driver

Size	Image
38mm	
65mm	
100mm	
Clip	


Colours

AliWood stock several wood look timber finishes, as detailed on our website. We can powdercoat our mill finish range to any colour you wish, in the Dulux and Interpon ranges.

To view our full range, visit www.aliwood.com.au/colours

Installation


Step 1 - Measure the width of your wall or solid surface

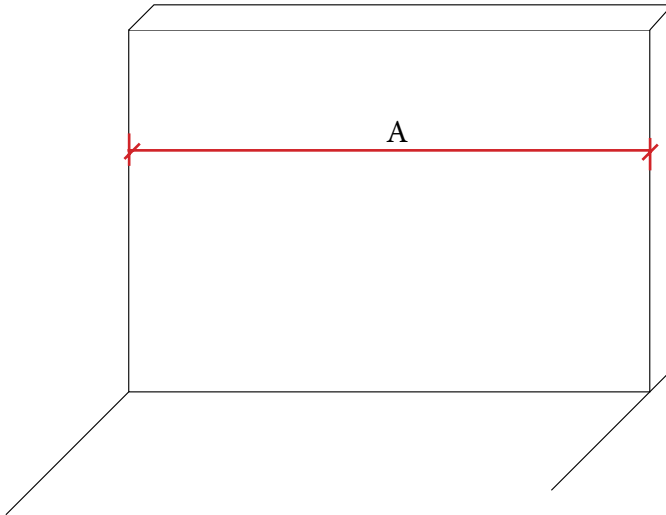


Note: Allow 2mm per metre for expansion / contraction.

Hint: Don't forget to allow for end caps if required.

Step 2 - Cut the tracking to size, this must be the intended full length of the desired screen length.

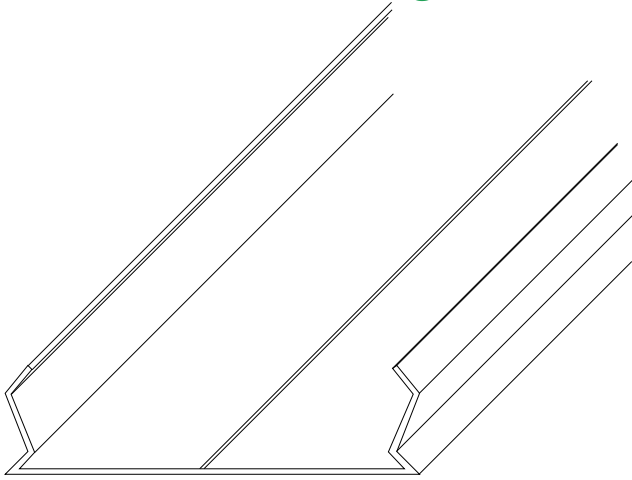


Step 3 - Cut the Clip-On slat to size

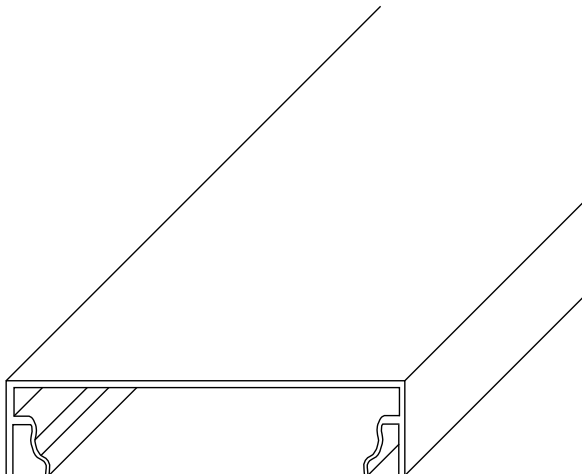

Installation

Step 4 - Secure the back of the tracking

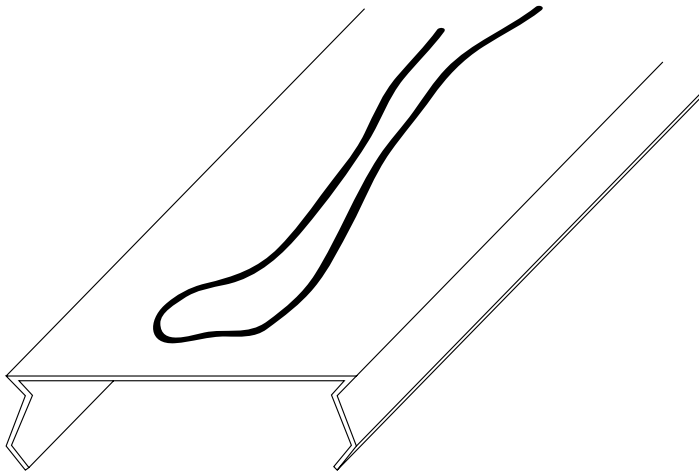


Secure the back tracking to the level surface, screw fix with appropriate screws for the substrate at 450mm centres. Ensure that there is a fixing within 50mm of the end of each track. A suitable construction adhesive can be used in conjunction with screws to assist with keeping the track flat. (use a minimum of 3 fixings per backing plate).

It is essential to ensure the surface the tracks are being fixed to is flat and level to ensure complete locking in of the screen system.

Hint: A recommended product to use for gluing is Sikaflex 11FC.

Screw Size: Waferhead 8g x 16mm - Metal
10g x 25mm - Timber


Step 5 - Attach the first piece of tracking to the surface

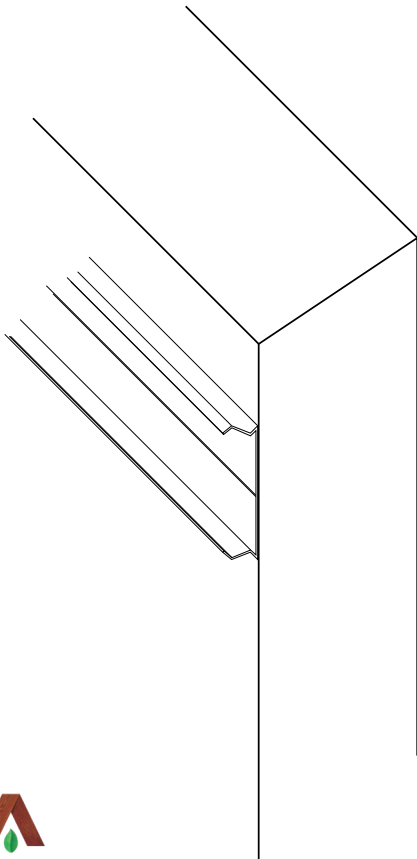

Hint: Ensure wall is flat and square prior to installing Clip On


Installation

Step 6 - Hold in place the second piece of tracking and use spacers in between

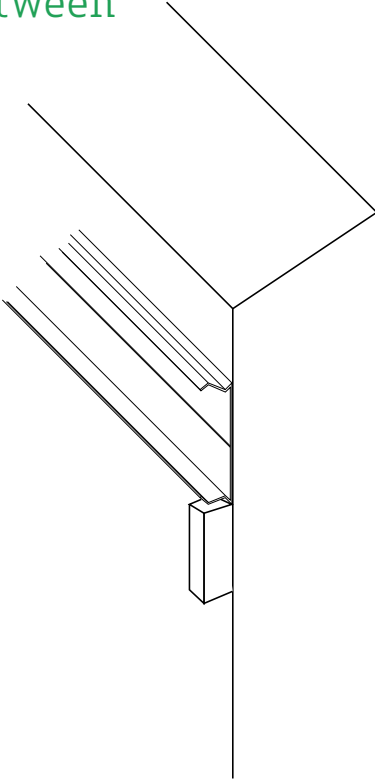

Hint: Spacer should allow for width of desired slat and gap between slat.


Step 7 - Place second piece of tracking onto surface and repeat until all tracking is spaced and secured to the surface

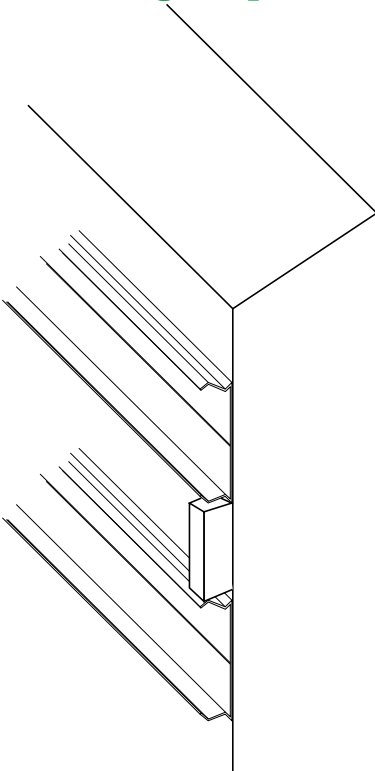

Hint: Spacer can be any material to represent the space between the finished slat widths.

Installation


Step 8 - Once tracking is installed, start placing Clip-On onto the tracking

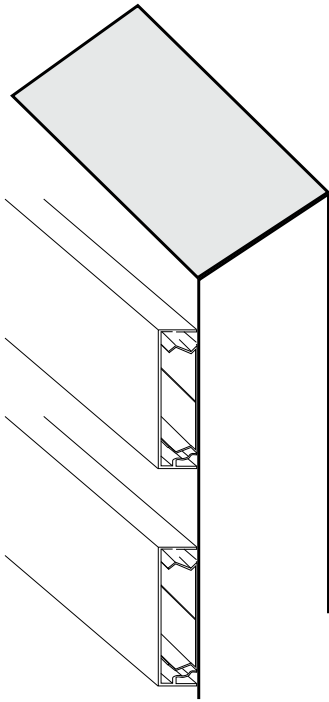

Hint: A rubber mallet may be used to knock long lengths of slats onto the backing plate.


Note: When joining Clip-On, ensure join for top pieces does not coincide with backing plate.

Step 9 - Remove Plastic film from the Clip-On

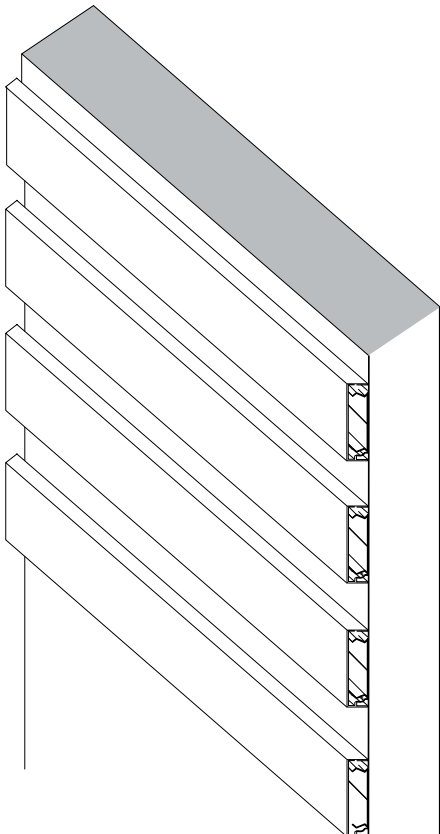

Installation

Step 10 – Fix End Caps

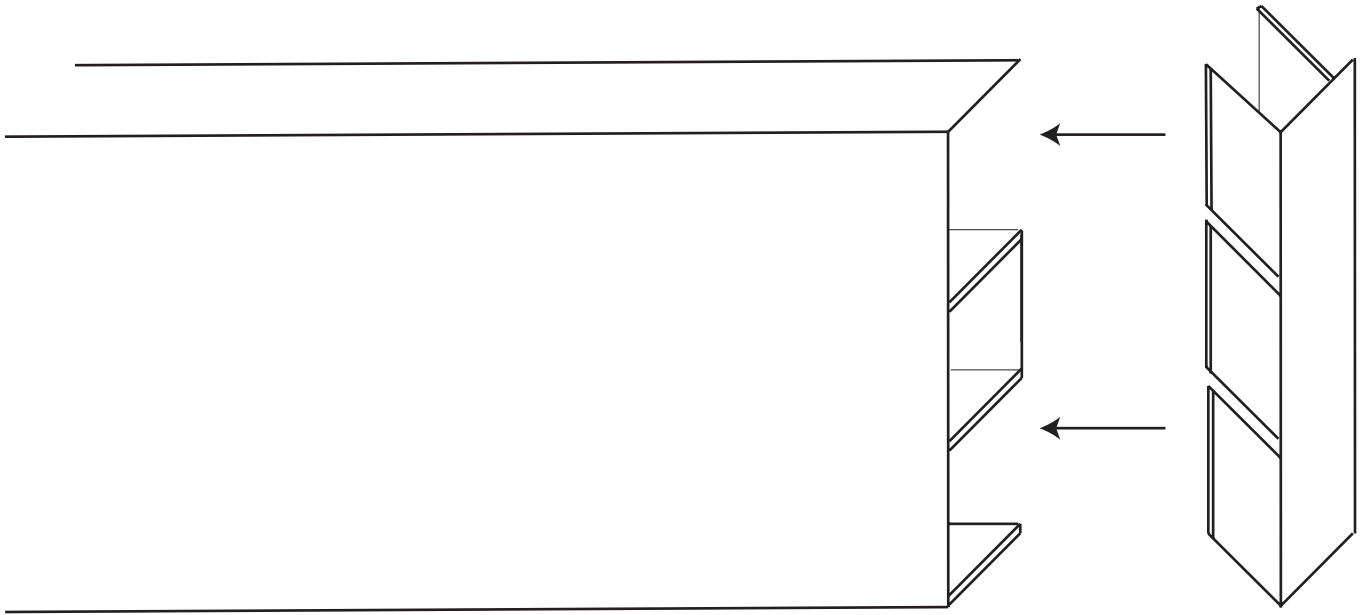

15mm End Caps are push fit and should be inserted with a dab of Sikaflex 11FC

Completed Projects



+61 3 5831 2574
+61 3 5831 2575

sales@aliwood.com.au
www.aliwood.com.au

445-447 Goulburn Valley Hwy Shepparton VIC 3631
PO Box 6458 Shepparton VIC 3632

ABN 25 613 779 025